

C++ Insights

How stuff works, Lambdas and more!



Andreas Fertig
<https://www.AndreasFertig.Info>
post@AndreasFertig.Info
@Andreas_Fertig



Andreas Fertig
v1.0



C++ Insights

2



© 2019 Andreas Fertig
<https://www.AndreasFertig.Info>
post@AndreasFertig.Info

| 1

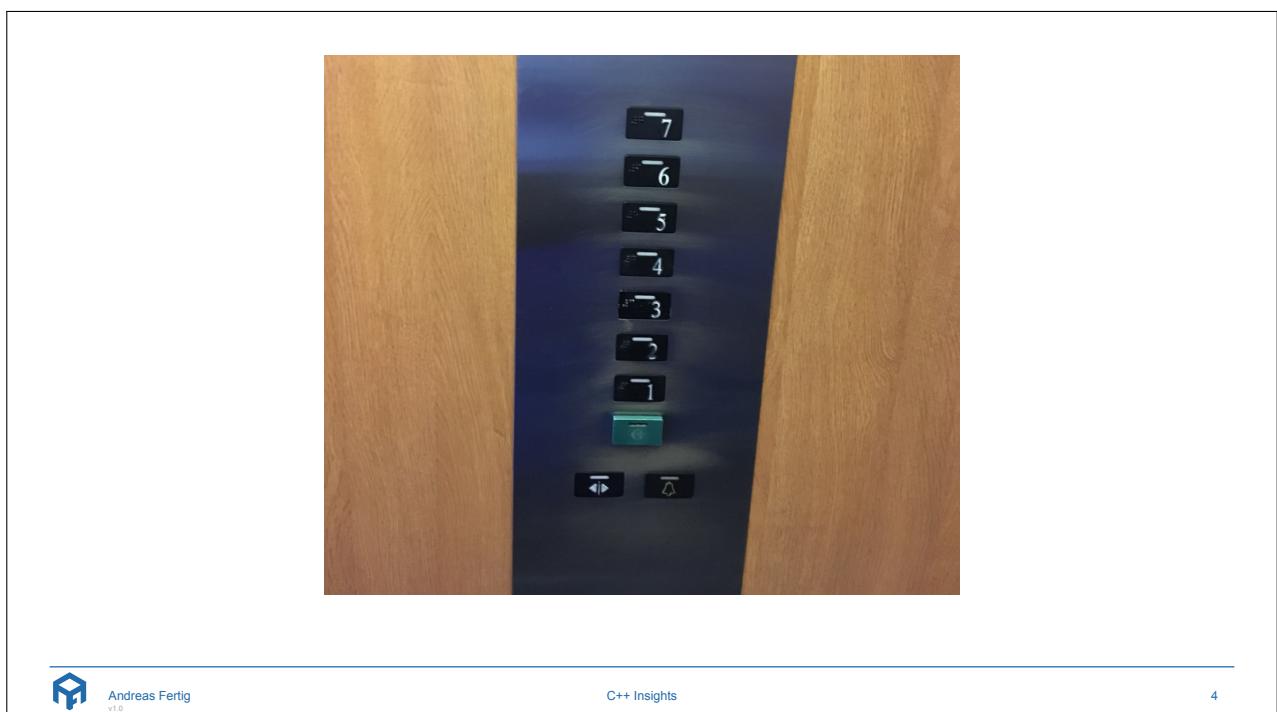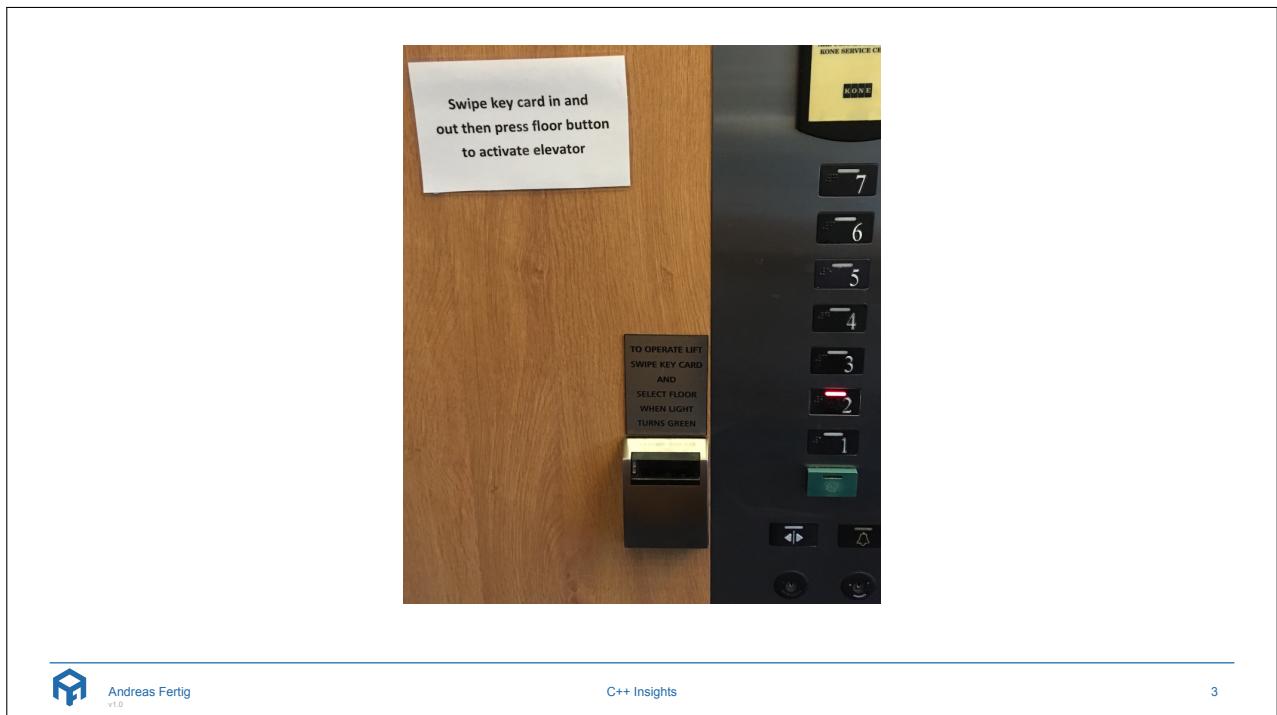

fertig

adjective /'fərtiç/

finished

ready

complete

completed



Andreas Fertig
v1.0

C++ Insights

5

Motivation

```
MyType i{};  
i++;
```



Andreas Fertig
v1.0

C++ Insights

6



Motivation

```
MyType i{};  
i.operator++( 0 );
```




Implicit Conversions

```
1 short int max(short int a, short int b)  
2 {  
3     return (a > b) ? a : b;  
4 }  
5  
6 void Main()  
7 {  
8     short int      a = 1;  
9     unsigned short int b = 65530;  
10    printf("max: %d\n", max(a, b));  
11 }  
12 }  
13 }
```




- Show what is going on.
- Make invisible things visible to assist in teaching.
- Create valid code.
- Create code that compiles.
- *Of course, it is open-source.*

<https://github.com/andreasfertig/cppinsights/>

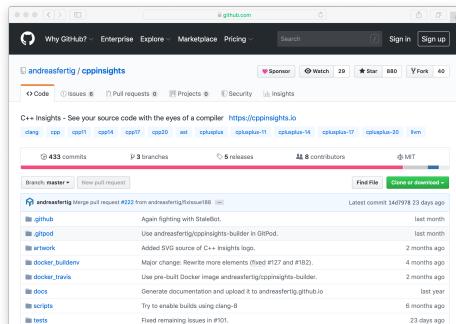

<https://cppinsights.io>

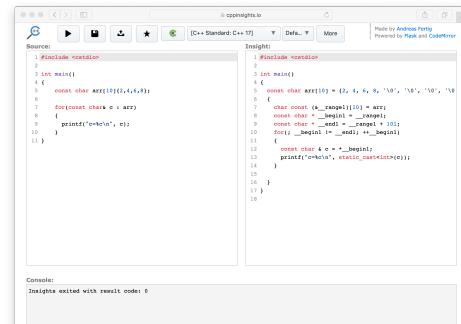

Andreas Fertig
v1.0

C++ Insights

9

A word about limitations

- C++ Insights is a Clang based tool.
- The official builds use the latest release version of Clang.
 - Hence, not all the newest interesting features are available.
- It uses the Clang AST which shows no optimizations.
 - Hence, tuning with `-O n` does not change anything in C++ Insights.
- Not *all* statements are currently matched.



Andreas Fertig
v1.0

C++ Insights

10



A word about limitations: Templates

- Creating code that compiles from templates is hard.
- To make it a bit easier for me there is a `#ifdef INSIGHTS_USE_TEMPLATE` to have the code, but inactive.

```

1 template<typename T>
2 void Func()
3 {}
4
5 class Demo
6 {
7 };
8
9 int main()
10 {
11     Func<Demo>();
12 }
```



What is an AST

```

'--FunctionDecl 0x106ee15a8 <astExample0/astExample0.cpp:3:1, line:6:1> line:3:5 main 'int ()'
'--CompoundStmt 0x106ee3ed8 <line:4:1, line:6:1>
    '--CXXOperatorCallExpr 0x106ee3ea0 <line:5:3, col:16> 'basic_ostream<char, std::__1::char_traits<char>>:'std::__1::/
        basic_ostream<char>' lvalue adl
    '|--ImplicitCastExpr 0x106ee3e80 <col:13> 'basic_ostream<char, std::__1::char_traits<char>> &(*)(basic_ostream<char, std::__1::
        ::char_traits<char> > &, const char *)' <FunctionToPointerDecay>
    '|--DeclRefExpr 0x106ee3df0 <col:13> 'basic_ostream<char, std::__1::char_traits<char>> &(basic_ostream<char, std::__1::/
        char_traits<char> > &, const char *)' lvalue Function 0x106ee2800 'operator<<' 'basic_ostream<char, std::__1::/
        char_traits<char> > &(basic_ostream<char, std::__1::char_traits<char> > &, const char *)'
    '|--DeclRefExpr 0x106ee1698 <col:3, col:8> 'std::__1::ostream':std::__1::basic_ostream<char>' lvalue Var 0x106ee0fb8 'cout' '/
        std::__1::ostream':std::__1::basic_ostream<char>'
    '|--ImplicitCastExpr 0x106ee3dd8 <col:16> 'const char *' <ArrayToPointerDecay>
    '--StringLiteral 0x106ee16c8 <col:16> 'const char [13]' lvalue "Hello, C++!\n"
```



What is an AST

```
1 #include <iostream>
2
3 int main()
4 {
5     std::cout << "Hello, C++!\n";
6 }
```



Default Argument

- How does a default argument take effect?

```
1 void Func(int x = 23) {}
2
3 int main()
4 {
5     Func();
6 }
```



Initialization

```
1 int main()
2 {
3     char a[5];
4     char b[5]{};
5     char c[5]{0};
6     char d[5]{77};
7 }
```



In-Class Member Initialization

```
1 class Init
2 {
3 public:
4     Init()
5     : i{9}
6     {
7     }
8
9     int           i{0};
10    std::vector<int> v{1, 2, 3};
11    std::string    s{"Hello"};
12 };
```



Lambda Internals

```

1 int main()
2 {
3     const char hello[]{"Hello ACCU Belfast"};
4
5     [&] { printf("%s\n", hello); }();
6 }
```



Generic Lambda

C++14

- Have a call operator which is a operator template with return type `auto`.
- The `auto` parameters are template parameters.

```

1 auto l = []( auto v) { return v * 2; };
2
3 auto d = l(2.0);
4 auto i = l(2);
```



C++20

Templated Lambdas

```

1 int main()
2 {
3     auto max = [] (auto x, auto y) {
4         return (x > y) ? x : y;
5     };
6
7     max(2, 3);    // ok
8     max(2, 3.0); // not wanted
9 }
```

Andreas Fertig
v1.0

C++ Insights

19

C++20

Templated Lambdas

```

1 int main()
2 {
3     auto max = []<typename T>(T x, T y)
4     {
5         return (x > y) ? x : y;
6     };
7
8     max(2, 3);    // ok
9     // max(2, 3.0); // does not compile anymore
10 }
```

Andreas Fertig
v1.0

C++ Insights

20



C++17

constexpr Lambdas

```

1 int main()
2 {
3     auto x = [] {};
```

Andreas Fertig
v1.0

C++ Insights

21

Getting the type right

```

1 int main()
2 {
3     map<int, char> m{};
4
5     for(const pair<int, char>& t : m) {
6     }
7
8     for(const pair<const int, char>& t : m) {
9     }
10
11    for(const auto& t : m) {
12    }
13
14    for(const auto& [k, v] : m) {
15    }
16 }
```

Source: [1]

Andreas Fertig
v1.0

C++ Insights

22



Range-based for statements with temporary

```

1 struct Keeper
2 {
3     std::vector<int> data{1, 2, 3};
4
5     auto& items() { return data; }
6 };
7
8 Keeper get()
9 {
10    return {};
11 }
12
13 int main()
14 {
15     for(auto& item : get().items()) {
16         std::cout << item << '\n';
17     }
18 }
```



Range-based for statements with initializer

C++20

```

1 struct Keeper
2 {
3     std::vector<int> data{1, 2, 3};
4
5     auto& items() { return data; }
6 };
7
8 Keeper get()
9 {
10    return {};
11 }
12
13 int main()
14 {
15     for(auto&& items = get(),
16          auto& item : items.items()) {
17         std::cout << item << '\n';
18     }
19 }
```



C++20

Range-based for statements with initializer

```

1 #include <cstdio>
2 #include <vector>
3
4 int main()
5 {
6     std::vector<int> v{2, 3, 4, 5, 6};
7
8     for(size_t idx{0}; const auto& e : v) {
9         printf("[%ld] %d\n", idx++, e);
10    }
11 }
```

Andreas Fertig
v1.0

C++ Insights

25

C++17

auto as non-type template parameter

- We can have `auto` as a non-type template parameter in C++17

```

1 #include <iostream>
2
3 template<auto sep = ' ', typename T, typename... Ts>
4 void Print(const T& targ, const Ts&... args)
5 {
6     std::cout << targ;
7
8     if constexpr(sizeof...(args) > 0) {
9         std::cout << sep;
10        Print<sep>(args...);
11    }
12 }
13
14 int main()
15 {
16     Print("Hello", "C++", 20);
17 }
```

Source: [2]

Andreas Fertig
v1.0

C++ Insights

26



C++17

auto as non-type template parameter

- We can have `auto` as a non-type template parameter in C++17

```

1 #include <iostream>
2
3 template<auto sep = ' ', typename T, typename... Ts>
4 void Print(const T& targ, const Ts&... args)
5 {
6     std::cout << targ;
7     auto coutSpaceAndArg = [] (const auto& arg) {
8         std::cout << sep << arg;
9     };
10    (... , coutSpaceAndArg(args));
11 }
12
13 int main()
14 {
15     Print("Hello", "C++", 20);
16 }
17

```

Source: [2]

Andreas Fertig
v1.0

C++ Insights

27

Support the project



<https://github.com/andreasfertig/cppinsights>



<https://www.patreon.com/cppinsights>



<https://shop.spreadshirt.de/cppinsights>

Andreas Fertig
v1.0

C++ Insights

28



So it is completely "fertig"? :-)



Andreas Fertig @Andreas_Fertig · Nov 4, 2018
I've made a couple of [cppinsights.io](#) updates: it can now handle more statements, more noexcept expressions and some other tweaks.
I also fixed the UI, there is new space between all buttons.

Check it out!

#cppinsights #cplusplus #cpp11 #cpp14 #cpp17 #cpp @isocpp

 C++ Insights
C++ Insights - See your source code with the eyes of a compiler.
cppinsights.io

Nasrin @__nasrin_ · Replying to @Andreas_Fertig @SoftwebCPP and @isocpp
So it is completely "fertig"? :-)

2:35 PM · Nov 5, 2018 · Twitter for iPhone

Source: [3]



Andreas Fertig
v1.0

C++ Insights

29

}

I am Fertig.

<https://cppinsights.io>

Available online:



<https://www.AndreasFertig.Info>

Images by Franziska Panter:



<https://panther-concepts.de>



Andreas Fertig
v1.0

C++ Insights

30



© 2019 Andreas Fertig
<https://www.AndreasFertig.Info>
post@AndreasFertig.Info

| 15

Used Compilers

- Compilers used to compile (most of) the examples.

- g++ (Homebrew GCC 9.2.0_1) 9.2.0
- clang version 9.0.0 (<https://github.com/llvm/llvm-project.git> 0399d5a9682b3cef71c653373e38890c63c4c365)



Andreas Fertig
v1.0

C++ Insights

31

References

- [1] Josuttis N., “When C++ auto is better”. <https://twitter.com/nicojosuttis/status/1132620873054261256?s=21>
- [2] Josuttis N., *C++17 - The Complete Guide*. leanpub, 2019.
- [3] [nasrin_](#), “So it is completely “fertig”? :-)”. <https://twitter.com/shelsLearningg/status/1059439178499452929>

Images:

33: Franziska Panter



Andreas Fertig
v1.0

C++ Insights

32



© 2019 Andreas Fertig
<https://www.AndreasFertig.Info>
post@AndreasFertig.Info

| 16

Upcoming Events

Talks

- [C++: \$\lambda\$ Demystified, code::dive, November 21, 2019](#)
- [C++: \$\lambda\$ Demystified, ESE Kongress, December 03, 2019](#)
- [C++ Insights: How stuff works, Lambdas and more!, OOP, February 06, 2020](#)

Training Classes

- [C++1x für eingebettete Systeme kompakt, QA Systems, November 14, 2019](#)
- [C++ Templates - die richtige Dosis \(kompakt\), QA Systems, November 15, 2019](#)
- [Programmieren mit C++11 bis C++17, Andreas Fertig, March 18, 2020](#)

For my upcoming talks check my [Talks](#) (<https://andreasfertig.info/talks.html>) page.
For my training services you can check <https://andreasfertig.info/services.html>.



About Andreas Fertig



Andreas is an independent trainer and consultant for C++ specializing in embedded systems. Since his computer science studies in Karlsruhe, he has dealt with embedded systems and the associated requirements and peculiarities. He worked for about 10 years for Philips Medizin Systeme GmbH as a C++ software developer and architect with focus on embedded systems.

Andreas is involved in the C++ standardization committee, especially in SG14 which deals with embedded systems.

He also develops macOS applications and is the creator of cppinsights.io.

